





- ◆ Non-film forming, permanent bonding impregnator does not change the look of the surface.
- ◆ Surface remains breathable, so that water which wicks into walls through the foundations can escape by evaporation.
- ◆ Most popular for protecting natural stone, where it is important to maintain the look and breathability.
- ◆ Penetrates and forms a water and oil repellent barrier, which limits the penetration of most types of graffiti making the graffiti easier to clean and reduces the possibility of permanent staining.
- ◆ GR1™ graffiti remover is recommended for removing graffiti from surfaces treated with Stain Protector™

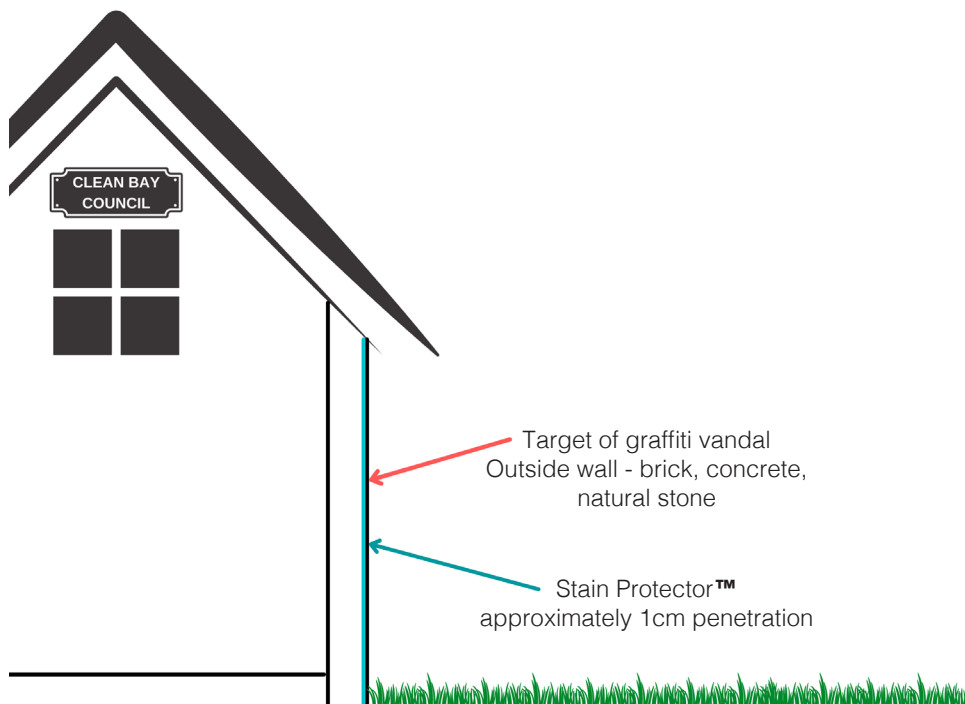

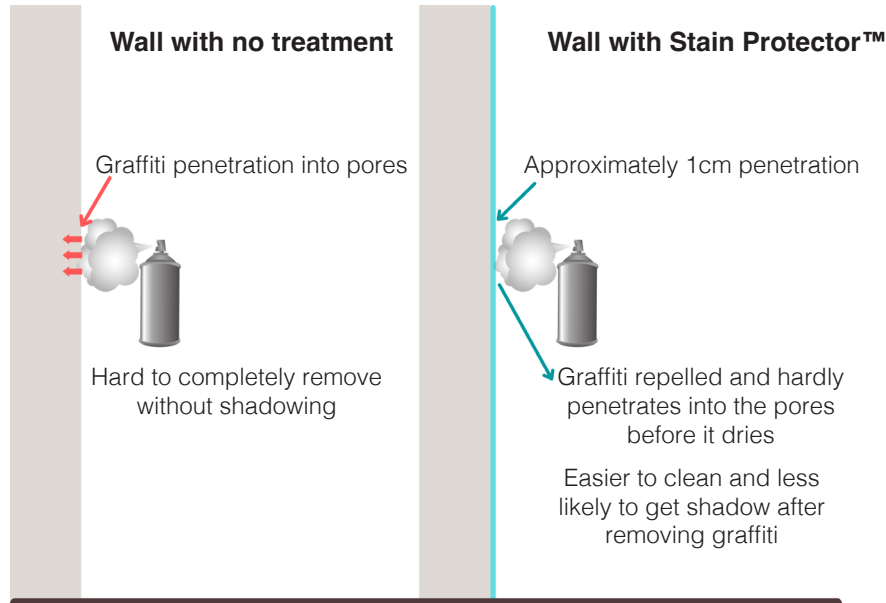

Stain Protector™	Anti-Graffiti Coating
Protection	
<ul style="list-style-type: none"> Limits penetration of graffiti into pores and makes cleaning easier. 	<ul style="list-style-type: none"> Coatings form a film barrier which provides excellent protection against all types of graffiti. Graffiti removers are still required to clean graffiti, which degrade the coating.
Appearance	
<ul style="list-style-type: none"> Keeps look of surface regardless of which graffiti remover is used – particularly important for natural stone. 	<ul style="list-style-type: none"> Creates a gloss or matte film, which can whiten, yellow and wear over time. <u>Also</u> graffiti removers will degrade the film, making it look unsightly.
Longevity	
<ul style="list-style-type: none"> Up to 15 years: High UV stability and chemical resistance. Not affected by pressure washing. 	<ul style="list-style-type: none"> Sacrificial: Re-apply every time wall is pressure washed. Semi-Permanent: 1-4 years depending on UV and cleaning regime. Graffiti removers can damage, then wall must be stripped to re-apply
Breathability and related issues	
<ul style="list-style-type: none"> Highly breathable – water in wall is able to evaporate out. Keeps pores dry which retards mould growth. 	<ul style="list-style-type: none"> Block pores, traps moisture inside wall. Efflorescence, mould and moisture can collect under the coating.
Re-application	
<ul style="list-style-type: none"> Clean wall and re-apply. 	<ul style="list-style-type: none"> Strip old coating off before re-application
Cost	
<ul style="list-style-type: none"> Higher initial cost of application Longevity = low long-term cost 	<ul style="list-style-type: none"> Lower initial cost High re-application costs

Related Products



GR1™
GR1™ Graffiti remover which is safe for masonry, natural stone and coated surfaces - suitable for surfaces treated with **Stain Protector™**. No carcinogenic petrochemical solvents.



GR2™
GR2™ Powerful graffiti remover for uncoated surfaces, including masonry and natural stone - NOT suitable for use on coated surfaces or surfaces treated with **Stain Protector™**. This is a stand-alone product.